






NC REVOLVING CENTERS WITH EXTENDED POINT

- QUAD BEARING DESIGN
- HEAVY DUTY



8814 NC




- High speed NC extended revolving centers with 60° point

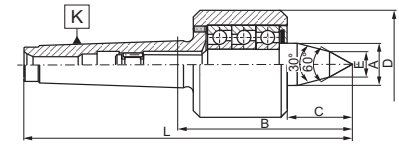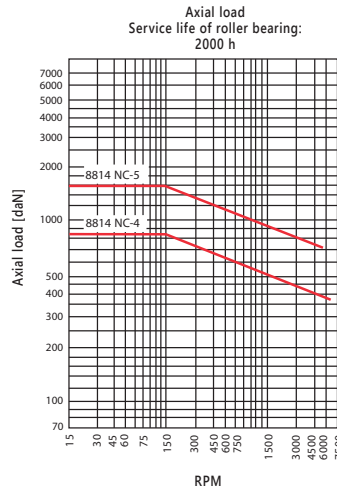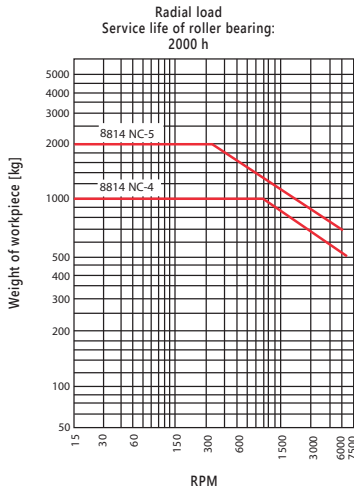

K MT	Max weight [lbs]	RPM	Max. concentr. error	Code No.	Max. concentr. error	Code No.	A [in]	B [in]	C [in]	D [in]	E [in]	L [in]
			[in] Precision		[in] Standard							
4	2,200	7,000	0.0002	7-566-004	0.0004	7-566-0040	1.10	4.67	1.93	2.76	0.55	8.70
5	4,400	6,000	0.0002	7-566-005	0.0004	7-566-0050	1.57	5.93	2.66	3.74	0.63	11.02

8815 NC

- High speed NC extended revolving centers with 60° point and draw off nut

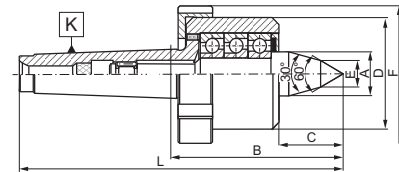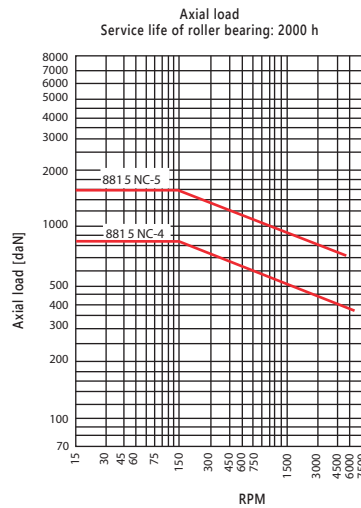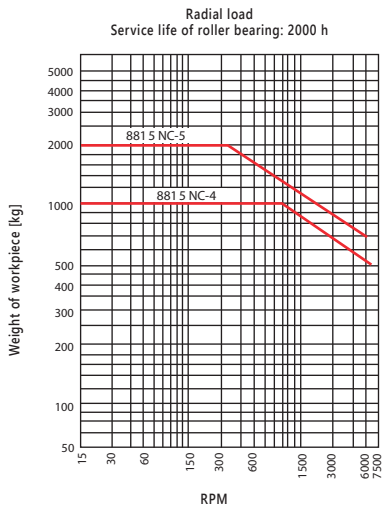

K MT	Max. weight [lbs]	RPM	Max. concentr. error	Code No.	Max. concentr. error	Code No.	A [in]	B [in]	C [in]	D [in]	E [in]	F [in]	L [in]
			[in] Precision		[in] Standard								
4	2,200	7,000	0.0002	7-569-004	0.0004	7-569-0040	1.10	4.67	1.93	2.76	0.55	3.23	8.70
5	4,400	6,000	0.0002	7-569-005	0.0004	7-569-0050	1.57	5.93	2.66	3.74	0.63	4.33	11.02