

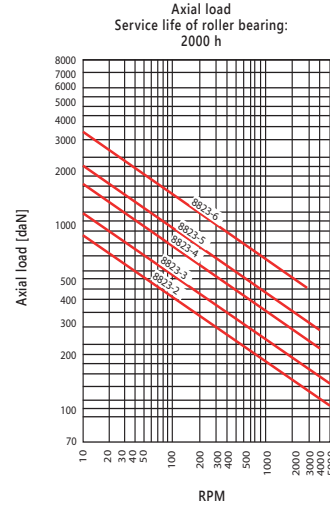


- TRIPLE BEARING DESIGN
- ADJUSTABLE ULTRA PRECISION RADIAL BEARING

8823

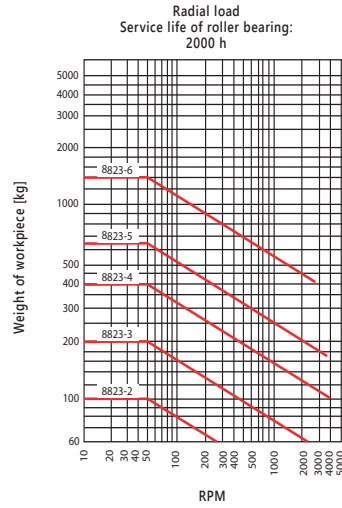

■ Radial compensation revolving centers with 60° point



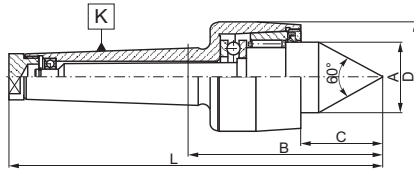


K MT	Max. weight [lbs]	RPM	Max. concentr. error		Code No.	Max. concentr. error		A [in]	B [in]	C [in]	D [in]	L [in]
			[in] Precision	[in] Standard		[in] Precision	[in] Standard					
2	220	8,000	0.0002	7-567-002	0.0002	7-567-0020	0.94	2.87	1.04	1.73	5.41	
3	440	6,000	0.0001	7-567-003	0.0002	7-567-0030	1.10	3.35	1.28	1.89	6.54	
4	880	4,500	0.0001	7-567-004	0.0002	7-567-0040	1.50	3.72	1.71	2.36	7.74	
5	1,430	4,000	0.0001	7-567-005	0.0002	7-567-0050	1.97	4.59	2.19	2.95	9.69	
6	3,080	3,000	0.0001	7-567-006	0.0003	7-567-0060	2.38	5.31	2.46	3.54	12.48	

8824



■ Radial compensation revolving centers with 60° point

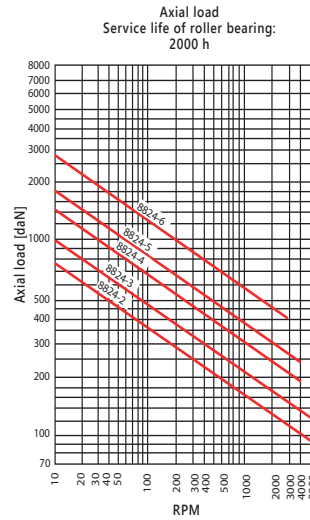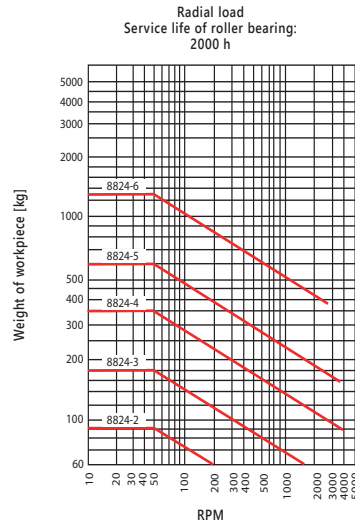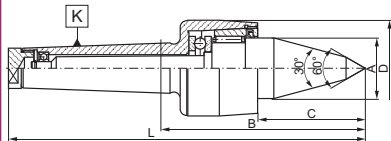

K MT	Max. weight [lbs]	RPM	Max. concentr. error [in]	Code No.	A [in]	B [in]	C [in]	D [in]	L [in]
2	198	8,000	0.0006	7-559-002	0.94	3.35	1.52	1.73	5.89
3	396	6,000	0.0006	7-559-003	1.10	3.94	1.87	1.89	7.13
4	770	4,500	0.0006	7-559-004	1.50	4.63	2.62	2.36	8.64
5	1,320	4,000	0.0006	7-559-005	1.97	5.81	3.41	2.95	10.91
6	2,860	3,000	0.0006	7-559-006	2.38	6.57	3.72	3.54	13.74