






HEAVY DUTY REVOLVING CENTERS WITH DRAW OFF NUT

- TRIPLE BEARING DESIGN
- HEAVY DUTY



8815




- HD revolving centers with 60° point angle and draw off nut

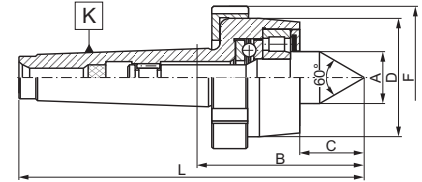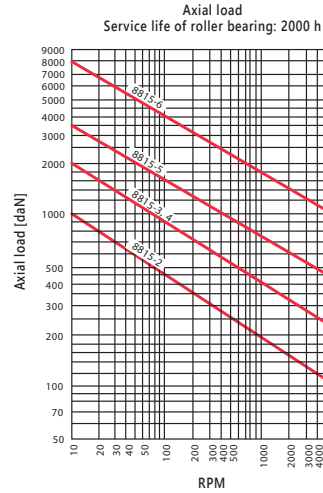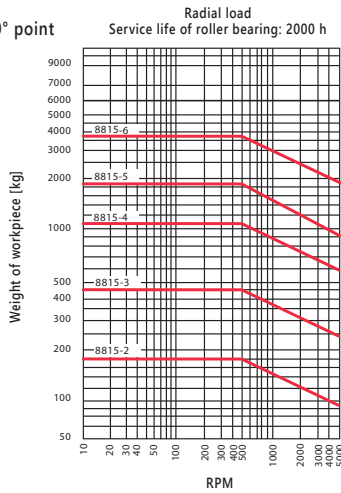

K MT	Max. weight [lbs]	RPM	Max. concentr. error	Code No.	Max. concentr. error	Code No.	A [in]	B [in]	C [in]	D [in]	F [in]	L [in]
			[in] Precision		[in] Standard							
1	220	5,000	0.0002	7-558-101	0.0003	7-558-001	0.59	1.95	0.67	1.50	1.97	4.06
2	396	5,000	0.0001	7-558-102	0.0003	7-558-002	0.71	2.22	0.85	1.57	2.05	4.74
3	990	4,000	0.0001	7-558-103	0.0003	7-558-003	0.98	2.95	1.08	2.20	2.68	6.14
4	2,200	3,000	0.0001	7-558-104	0.0003	7-558-004	1.26	3.35	1.32	2.52	2.99	7.36
5	4,180	2,500	0.0002	7-558-105	0.0004	7-558-005	1.57	4.25	1.73	3.35	3.94	9.33
6	8,140	2,000	0.0002	7-558-106	0.0004	7-558-006	2.46	5.96	2.52	5.12	5.91	13.13

8816

- Carbide-tipped HD revolving centers with 60° point angle and draw off nut

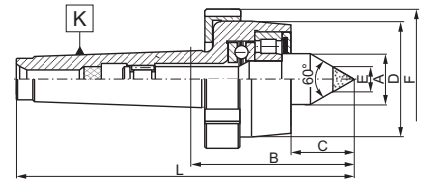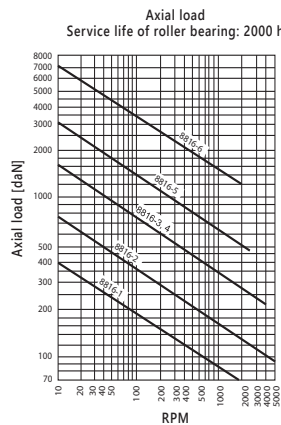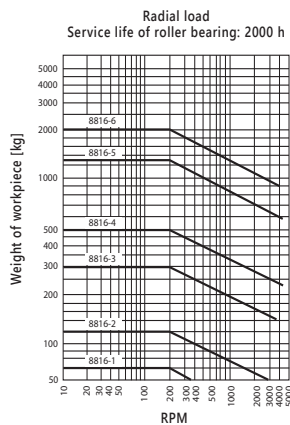

K MT	Max. weight [lbs]	RPM	Max. concentr. error	Code No.	Max. concentr. error	Code No.	A [in]	B [in]	C [in]	D [in]	F [in]	E [in]	L [in]
			[in] Precision		[in] Standard								
1	132	5,000	0.0002	7-557-101	0.0003	7-557-001	0.59	1.95	0.67	1.50	1.97	0.28	4.06
2	264	5,000	0.0001	7-557-102	0.0003	7-557-002	0.71	2.22	0.85	1.57	2.05	0.28	4.74
3	660	4,000	0.0001	7-557-103	0.0003	7-557-003	0.98	2.95	1.08	2.20	2.68	0.43	6.14
4	1,100	3,000	0.0001	7-557-104	0.0003	7-557-004	1.26	3.35	1.32	2.52	2.99	0.55	7.36
5	2,750	2,500	0.0002	7-557-105	0.0004	7-557-005	1.57	4.25	1.73	3.35	3.94	0.71	9.33
6	4,400	2,000	0.0002	7-557-106	0.0004	7-557-006	2.46	5.96	2.52	5.12	5.91	0.71	13.13